


INTERCOMPOSITE®

INTERCOMPOSITE

The composite laminated shim

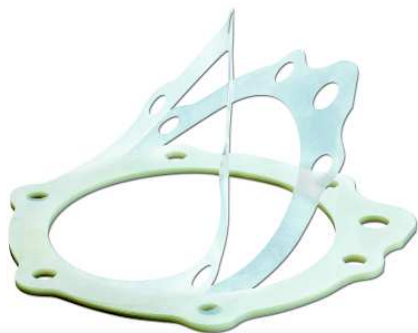

INTERCOMPOSITE®⁽¹⁾ is a unique designed LAMECO material.

This composite material is made of a polyethylene glycol terephthalate film obtained by a slit-die extrusion process, followed by a double-drawing.

Advantages:

LIGHTNESS

As an answer to a weight saving requirement. INTERCOMPOSITE® is one of the lightest of laminated materials.

Material	Specific weight	Weight-saving
INTERCOMPOSITE®	1,395	
Aluminium	2,8	2,01 X

GOOD PHYSICAL, MECHANICAL, THERMIC AND CHEMICAL CHARACTERISTICS

This data is communicated on request by return of e-mail.

ANTI-FRETTING

INTERCOMPOSITE® is a total barrier against the galvanic coupling caused by surface contact of different metallic alloys. No further surface treatment is required.

ADAPTATION TO CURVED SHAPES

INTERCOMPOSITE® has the property to immediately adapt itself to most curves profiles without any loss of precision. And this can be performed in site.

FACILITY AND RAPIDITY OF USE

You can peel INTERCOMPOSITE® with your forefinger (no tools being necessary) and once peeled the sheets are reusable.

(1) INTERCOMPOSITE® - Trademark registered, France: Patent No. FR 2 572 411 B1

(2) DUOPEEL® - Trademark registered, see patent numbers on the sheet devoted to this product.

INTERCOMPOSITE

The composite laminated shim

SAFETY

INTERCOMPOSITE® is easily peeled without risk of finger cuts.

Low cost

INTERCOMPOSITE® (as well as DUOPEEL®(2)) is the least expensive of all our laminated materials.

SMART AND ECONOMICAL

Once peeled, the sheets remain flat and show no signs of deformation. They can thus be re-used and can serve as single-unit shimming parts.

Dimensions of INTERCOMPOSITE® products:

Standard	Specific weight	Thickness of laminations (mm / inch)								
		Standard								
		0,012 / .0005	0,019 / .0007	0,023 / .0009	0,025 / .001	0,05 / .002	0,075 / .003	0,1 / .004	0,2 / .008	
		3	4	5	6	7	8	9	11	
LS12	1,395	x	x	x	x	x	x	x	x	x



LAMECO · 2 bis, rue Blaise Pascal · ZA de Pissaloup
78190 TRAPPES France · Tél.: 01 30 68 61 05 · Fax: 01 30 68 14 47
E-mail: Lameco@LamecoGroup.com · SA au Capital de 312 800 Euros
SIRET 302 177 936 00051 - APE 2562 B

www.LamecoGroup.com